

LED Tact Switch


KLS 7-TS2 LED Tact switch 6x6mm

MATERIAL:

Base Frame: Nylon66, UL rated:94 V-0. ;
Actuator: PBT, UL rated:94 V-0. ;
Terminal: Brass, Silver or Tin plated .

Specifications

Circuit:SPST
Current rating:50mA
Voltage rating:12VDC
Dielectric withstanding voltage:250VAC for 1 minute
Contact resistance:100mΩ Max. (Initial)
Insulation resistance:100MΩ Min.
Operating force:180± 50gf
Total travel:0.25mm± 0.1 mm
Operating life:100,000 cycles Min
Solder specifications:256°C for 5 seconds
Function:Momentary
Operating temperature:+10°C ~ +60°C

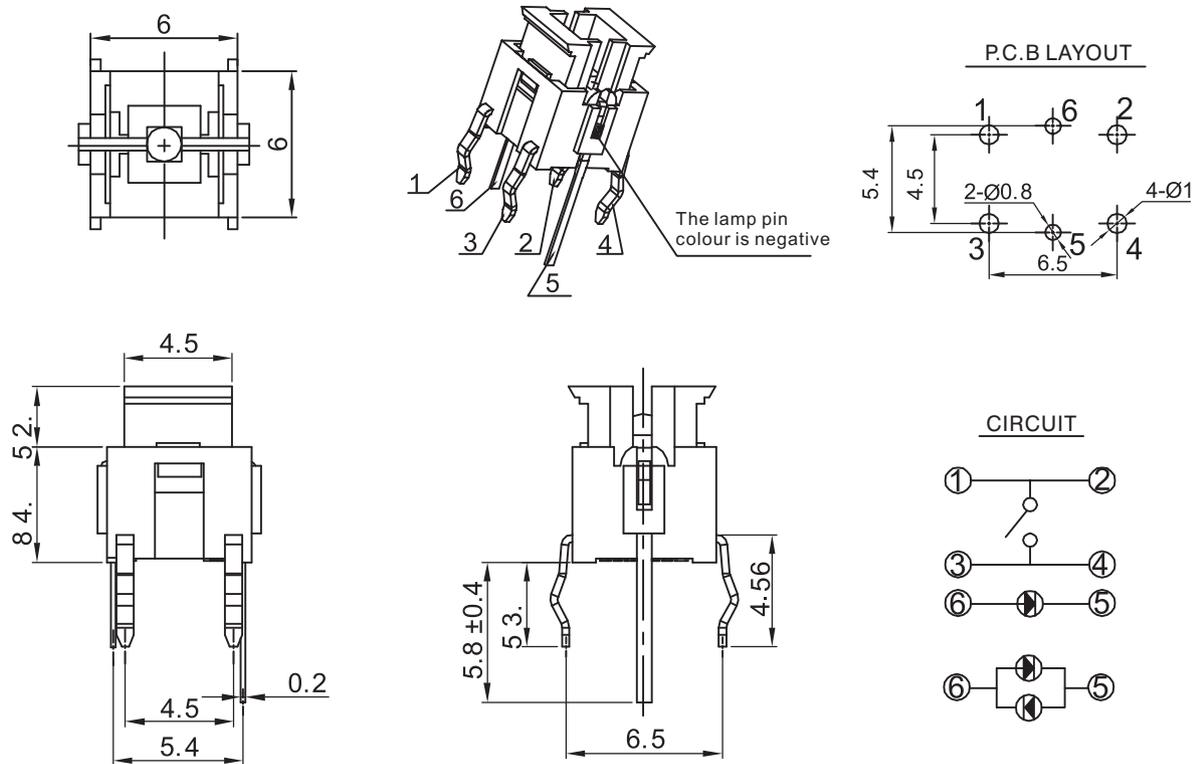

ORDER INFORMATION

Product NO.:KLS7-TS2-00-00RG-0N-41S

