


SECTION A-A

PCB LAYOUT

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	Description:
X: ±0.60	X: ±5°	UNITS	Through hole reflow 5.08mm
X: ±0.38	X: ±3°	SHEET SIZE	
XX: ±0.25	XX: ±2°	KLS P/N:	

Draw by: Date	2015-09-01	KLS2-THREDR-5.08-XXP-S
Check by: Date	2015-09-15	
SCALE	SHEET	OF

Order Information

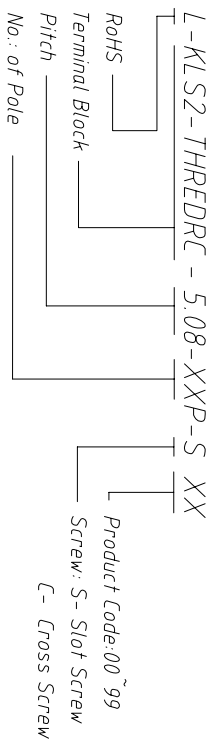

Material
 Pin header: Brass, Tin plated
 Housing: LCP, UL94V-0, Black

Electrical
 Rated voltage: 300V
 Rated current: 15A
 Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min

Mechanical
 Temp. Range: -40 °C ~ +130 °C
 Soldering: 285 °C ±5 °C for 10S

KLS ELECTRONIC CO., LTD.